



[www.elotouch.com](http://www.elotouch.com)

**Included items:**

- 1x EloPOS Touchcomputer
- 1x Power Cable US/Canada
- 1x Power Cable Europe
- 1x +24 Volt Power Adaptor
- 1x RJ45 to RS232 Serial Cable
- 1x Quick Install Guide
- 1x Security Cover & Screws
- 1x Cable Management Kit

## Quick Installation Guide

EloPOS

All-in-One TouchComputer

**Elo Touch Solutions Technical Support**

Online self-help:  
[www.support.elotouch.com](http://www.support.elotouch.com)

Revision B  
P/N E511178

**North America**

800-ELO-TOUCH  
Tel +1 408 597 8000  
Fax +1 408 597 8050  
[EloSales.NA@elotouch.com](mailto:EloSales.NA@elotouch.com)

**Asia-Pacific**

Tel +86 (21) 3329 1385  
Fax +86 (21) 3329 1400  
[www.elotouch.com.cn](http://www.elotouch.com.cn)

**Europe**

Tel +32 (0)16 70 45 00  
Fax +32 (0)16 70 45 49  
[elosales@elotouch.com](mailto:elosales@elotouch.com)

**Latin America**

Tel 786-923-0251  
Fax 305-931-0124  
[www.elotouch.com](http://www.elotouch.com)



The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo (logo) and Elo Touch Solutions are trademarks of Elo and its Affiliates.




Please go to [www.elotouch.com/support](http://www.elotouch.com/support) to verify you have the latest drivers before installing this device.


- 1 Connect the power adaptor (16:9 model is shown below).



- 2 Make additional connections from the back of the Touchcomputer.

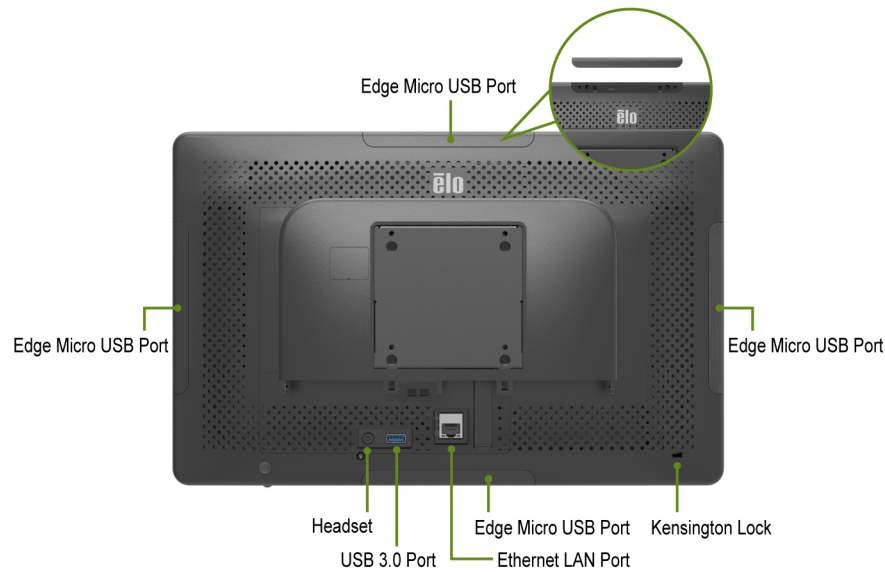

- 3 Make additional connections from the bottom of the stand module or the Touchcomputer.

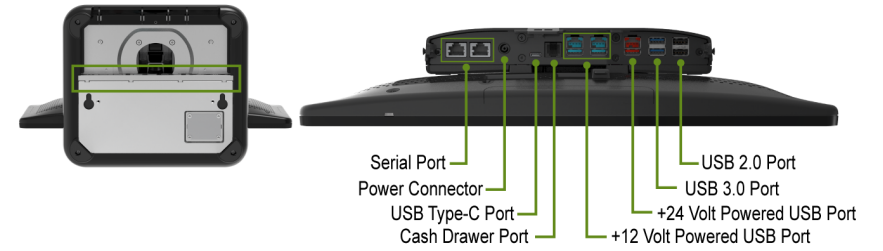

- 4
- Install the security cover for the head only model, and route the cable with cable management kit.
  - Mount on stand or wall using 75 mm x 75 mm VESA mounting interface for the head only model.
  - Press the power button to turn on the Touchcomputer.

